


ASCOT ECO

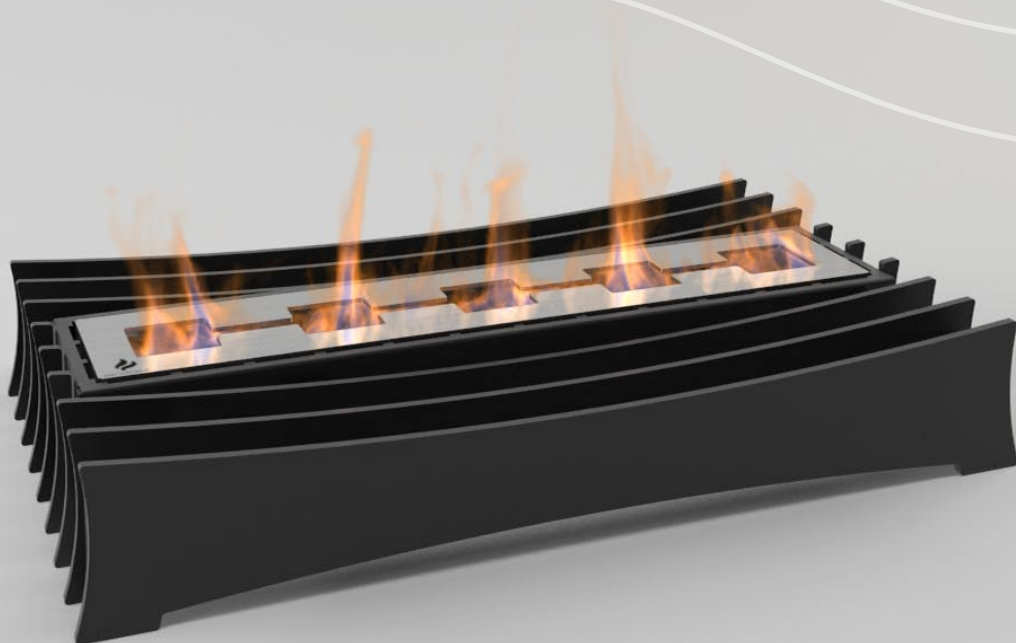

ASCOT ECO Fireplace Insert

DecoFlame's series of bioethanol fireplace inserts Ascot is the solution for owners of traditional fireplaces who are not only tired of messy wood burning logs but also wish to opt for a greener, more environmentally friendly alternative.

The decoFlame® Ascot Eco series comes in three different dimensions as standard and can optionally be shielded to the front and/or to the back with a hardened glass screen.

The flame intensity cannot be adjusted on the Ascot Eco burner.

Specifications

Materials:

Aluminium and stainless steel, hardened glass optional.

Finishes:

Powder-coated aluminium and brushed stainless steel.

Burner volume:

400mm burner - 1.8 litres

500mm burner - 2.3 litres

600mm burner - 2.8 litres

Use only bioethanol for decoFlame® fireplaces.

Heat efficiency:



400mm burner - 3 kW/h

500mm burner - 3.8 kW/h

600mm burner - 4.5 kW/h

Burning duration:

All decoFlame® ECO burners have an average burning duration of 6 hours. Actual values might vary according to air flow/draught around the fireplace insert.

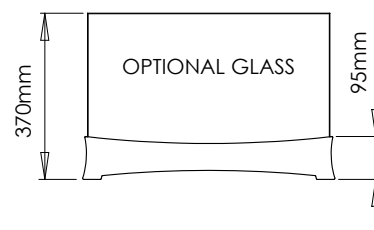

Design: Kjell Thomsen



decoFlame®
Odor- and smokeless bio fireplaces